


PUMP CATALOGUE

MARCO 

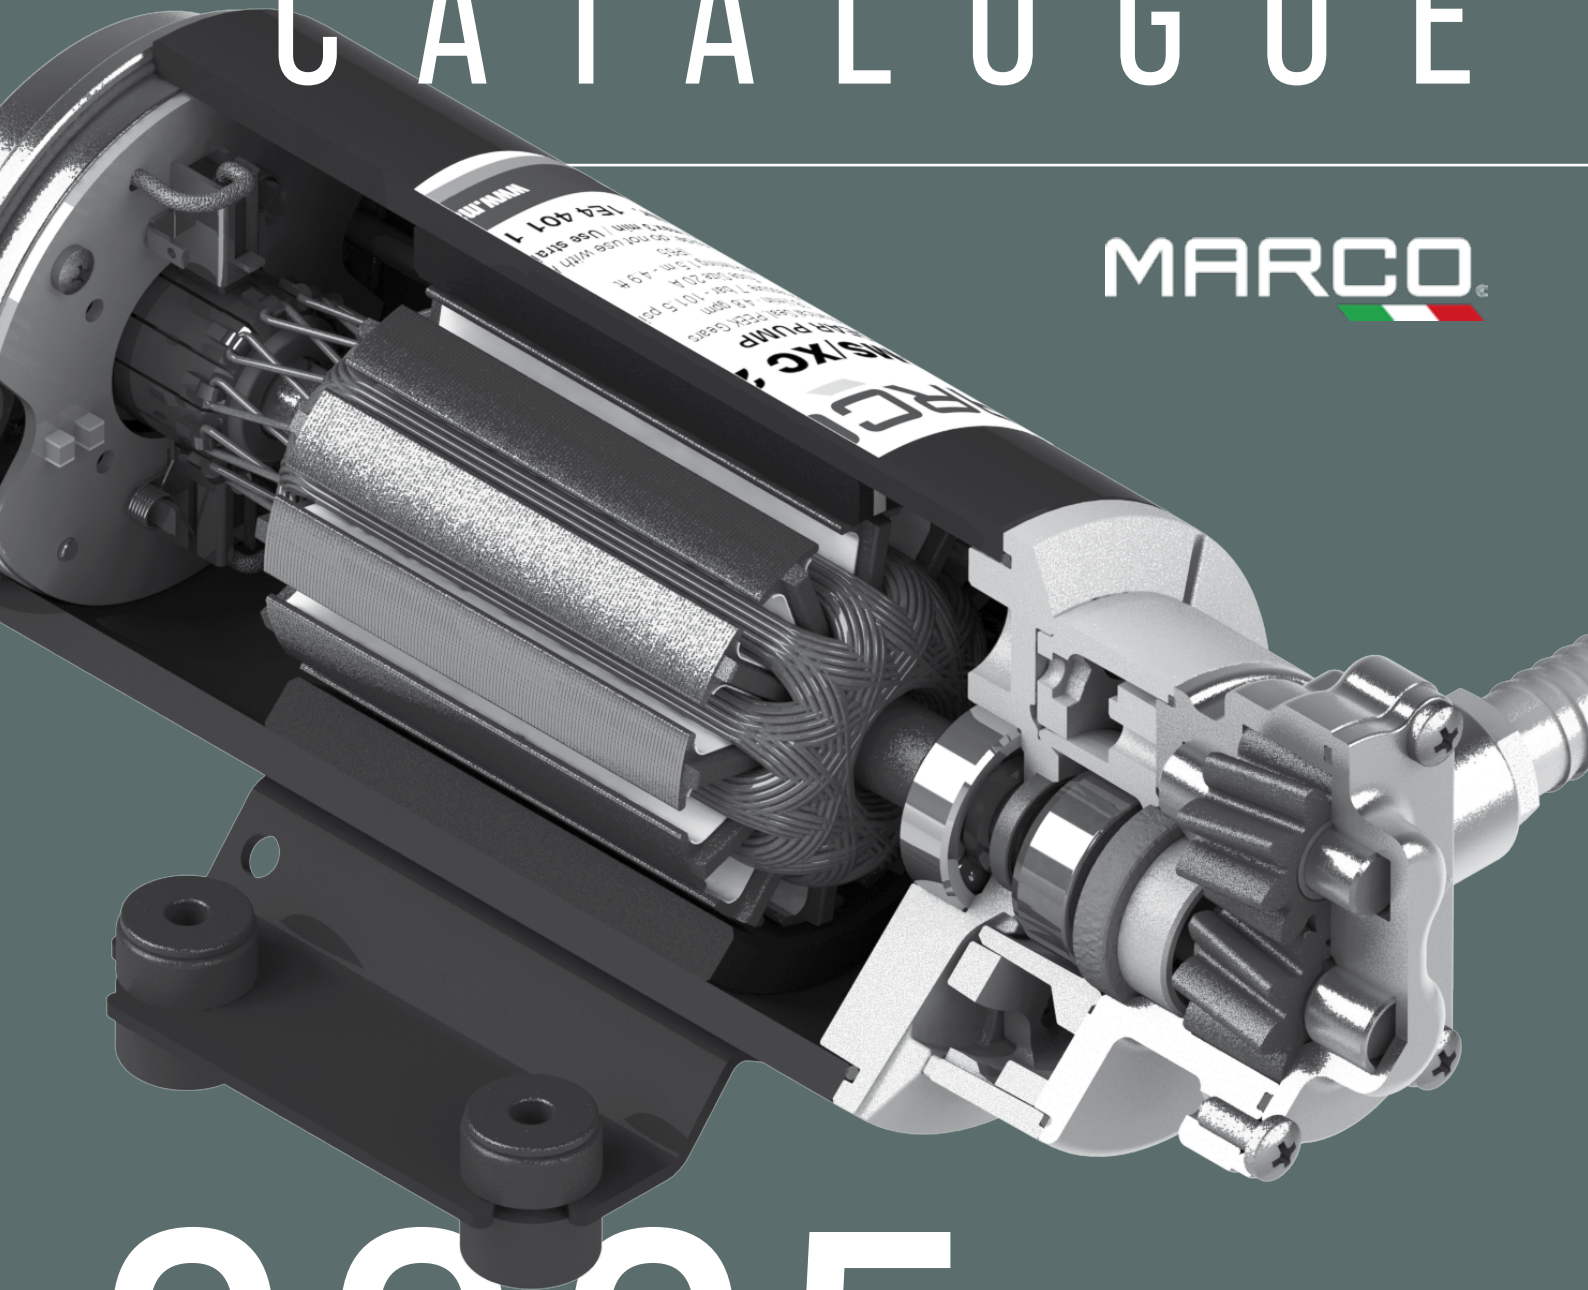

2025




FLEXIBLE IMPELLER 12V and 24V - DC

UP1-J/OIL

- FKM Impeller
- Low speed
- Special for oil change



12V
24V

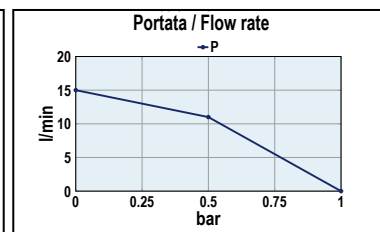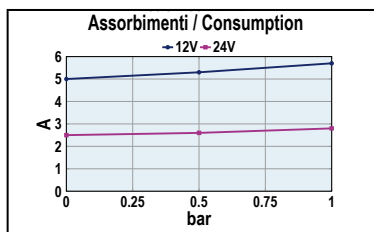

PORTATA*
FLOW RATE*
max.

15 l/min
4 gpm

PRESSIONE
PRESSURE
max.

1 bar
14.5 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 005 12	12	1	5A	120W	7,5A	20 mm	3/8" BSPP	1,8 kg
162 005 13	24	1	2,5A	120W	4A	20 mm	3/8" BSPP	1,8 kg




* OIL SAE 30 AT 25°C

IMPELLER PUMPS 12V and 24V - DC

UP1-J




12V
24V

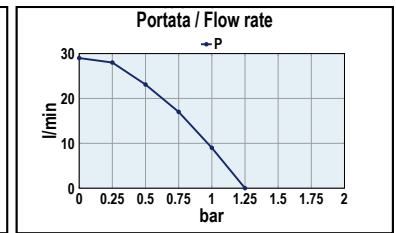

PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.
28 l/min 7.4 gpm	1,25 bar 18.1 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 004 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
162 004 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg




UP1-JS



On/Off switch




12V
24V

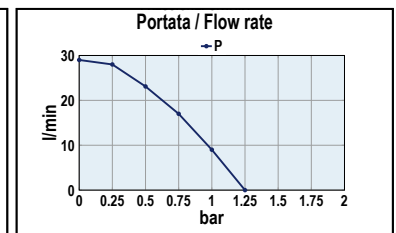

PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.
28 l/min 7.4 gpm	1,25 bar 18.1 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 010 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
162 010 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg




UP1-JR



On/Off 3 positions
reversing switch



12V
24V

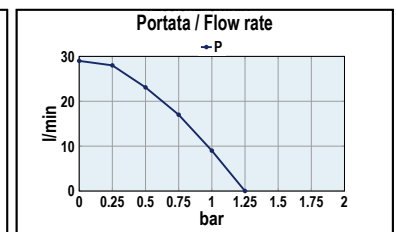




PORTATA FLOW RATE max.	PRESSIONE PRESSURE max.
28 l/min 7.4 gpm	1,25 bar 18.1 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 011 12	12	1,5	8A	150W	10A	20 mm	3/8" BSPP	1,8 kg
162 011 13	24	1,5	4A	150W	7,5A	20 mm	3/8" BSPP	1,8 kg

UP1



12V
24V

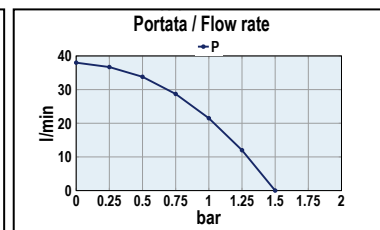

PORTATA
FLOW RATE
max. **35 l/min**
9.2 gpm




PRESSIONE
PRESSURE
max. **1,5 bar**
21.8 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 002 12	12	1,5	10A	180W	20A	25 mm	1/2" BSPP	2,9 kg
162 002 13	24	1,5	5A	180W	15A	25 mm	1/2" BSPP	2,9 kg

UP1-M



12V
24V

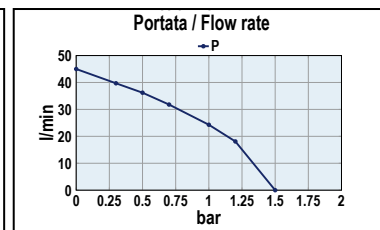

PORTATA
FLOW RATE
max. **45 l/min**
11.9 gpm

PRESSIONE
PRESSURE
max. **1,5 bar**
21.8 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 006 12	12	1,5	14A	360W	20A	25 mm	1/2" BSPP	4,1 kg
162 006 13	24	1,5	7A	360W	15A	25 mm	1/2" BSPP	4,1 kg

UP1-B






OPTIONAL

RCS Control Panel (page 33)

- Reversible
- Ideal for ballast applications



12V
24V

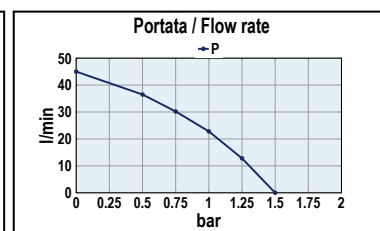

PORTATA
FLOW RATE
max. **45 l/min**
11.9 gpm

PRESSIONE
PRESSURE
max. **1,5 bar**
21.8 psi

CODICE PART NUMBER	VOLTS	ADESCAM. SELF-PRIM. m	CONS.	MOTORE MOTOR	FUSIBILE FUSE	TUBO TUBE	BOCCHIE PORTS	PESO WEIGHT
162 003 12	12	1,5	14A	180W	20A	25 mm	1/2" BSPP	2,9 kg
162 003 13	24	1,5	7A	180W	15A	25 mm	1/2" BSPP	2,9 kg